

The need for urban form data in spatial modeling of urban carbon emissions in China: A critical review

Meng Cai^a, Yuan Shi^b, Chao Ren^{c,*}, Takahiro Yoshida^d, Yoshiki Yamagata^d, Chao Ding^e, Nan Zhou^e

^a School of Architecture, The Chinese University of Hong Kong, Hong Kong

^b Institute of Future Cities, The Chinese University of Hong Kong, Hong Kong

^c Faculty of Architecture, The University of Hong Kong, Hong Kong

^d National Institute for Environmental Studies, Japan

^e Lawrence Berkeley National Laboratory, USA

ARTICLE INFO

Handling editor: M.T. Moreira

Keywords:

Urban carbon emissions

Spatial modeling

Systematic review

Urban form

China

ABSTRACT

Cities produce over 70% of global carbon emissions and are thus crucial in driving climate change. Urban carbon emissions may continue to increase especially in those less-developed countries and regions which are still under rapid urban development. Policymakers need to find ways to effectively control and reduce carbon emissions. Thus, spatial modeling methods to map and predict urban carbon emissions have been developed to meet these needs. This paper examines the progress of the spatial modeling of carbon emissions and the relationship between urban form and carbon emissions in China by reviewing more than 100 peer-reviewed journal articles in the Scopus database. The latest prediction methods and techniques are described in the paper. Their advantages and limitations are then discussed. Urban forms have a significant influence on carbon emissions and have been applied in spatial modeling studies in other countries. However, this review has identified the lack of urban form data and high-resolution inventories from existing studies in China. Future developments in the spatial modeling in China should therefore have a fine spatial resolution and incorporate open and high-quality urban form data, including urban morphology and land use/land cover.

1. Introduction

Carbon dioxide (CO₂) is the principal anthropogenic greenhouse gas (GHG) and the major cause of climate change (IPCC, 2007). The global atmospheric CO₂ concentration has risen from about 280 ppm before industrialization to 409.8 ppm in 2019 (Lindsey, 2020). To achieve the goal of controlling temperatures for climate change mitigation, carbon emissions need to be significantly reduced (Pachauri et al., 2014). Cities contribute 71%–76% of global carbon emissions from energy activities, so they are the major focus for carbon emissions mitigation (Pachauri et al., 2014). The world population from 2012 to 2050 is anticipated to rise mainly in cities according to the United Nations population estimate (UN DESA, 2018). Global carbon emissions are foreseen to grow due to the projected urban development. Since urban carbon emission inventory is the foundation for attempts to mitigate carbon emissions, policymakers and the scientific community have made significant efforts to establish carbon emission inventories to deal with climate change.

Most previous investigations on emission modeling used production-based statistics at the administrative units level (e.g. provincial or city level) based on Intergovernmental Panel on Climate Change (IPCC) or provincial-level Guidelines (Clarke-Sather et al., 2011; Shan et al., 2017). Although the inventories are authoritative, the spatial variations and the energy consumption within the administrative unit cannot be revealed, which limits their further impact on the interdisciplinary actions to climate change mitigation (Cao et al., 2014).

The spatial modeling of urban carbon emissions can facilitate the development of spatially distributed emission inventories and reveal the spatial patterns within an administrative unit (Ou et al., 2015b). These inventories can provide a spatial visualization of the carbon emissions from both production and consumption, enabling the practical and realistic assessment of emission mitigation, such as identifying the carbon emission hotspots, energy activities responsible for high emissions, etc. (Kanemoto et al., 2016). They can also be integrated with other spatial data to facilitate interdisciplinary cooperation to reduce carbon

* Corresponding author.

E-mail address: renchao@hku.hk (C. Ren).

<https://doi.org/10.1016/j.jclepro.2021.128792>

Received 19 February 2021; Received in revised form 27 July 2021; Accepted 21 August 2021

Available online 22 August 2021

0959-6526/© 2021 Elsevier Ltd. All rights reserved.

emissions. Consequently, a variety of approaches have been developed and used to spatially model the carbon emissions in different cities (Cai et al., 2018b; Doll et al., 2000).

China has been industrializing and urbanizing at an accelerating pace since the beginning of its reform and opening in 1978. The rapid development has unavoidably caused massive carbon emissions which impeded the sustainable development of China and impacted the global climate (Paltsev et al., 2012). China has become the country that emits the highest amount of carbon emissions in the world since 2006 (Netherlands Environmental Assessment Agency, 2007). Moreover, China's carbon emissions are predicted to keep increasing until 2025 as a consequence of the continuous industrial transformation and economic growth (Zhou et al., 2019). Consequently, the Chinese government has set ambitious GHG mitigation targets and pledged to be carbon neutral by 2060 (Wang, 2009; Xinhua, 2020).

The development of the spatial inventory of carbon emissions can therefore serve as a cutting-edge tool for governments at different levels to meet China's timely need for achieving carbon neutrality. Besides, urban development is a vital element for carbon emission and its reduction. City planning and space optimization policies, particularly those targeting urban form, are growingly significant in carbon emissions control and mitigation (Wang et al., 2015). In order to further develop our knowledge in controlling and reducing carbon emissions for China, it is necessary to review the past developments and studies on the spatial modeling of carbon emission to understand their capabilities, advantages, and limitations. A comprehensive understanding of the influence of urban forms on carbon emissions is also essential for the implementation of low carbon strategies in China.

Therefore, this study aims to perform a systematic review to synthesize the available literature on 1) the existing methodologies and data for the spatial modeling of urban carbon emissions in China, and 2) the relationship between the urban form and carbon emissions in China. This study is the first one to review the spatial inventories of urban carbon emissions in China. Previous reviews on CO₂ inventories generally focused on the statistical approach (Chen et al., 2017; Yang et al., 2016). Although they pointed out the shortcomings of the existing statistical approach in China, this manuscript will provide new insights and perspectives beyond existing reviews since it investigates the spatial inventories within a city boundary, which can support the control and mitigation of carbon emissions regarding urban planning and space optimization strategies. Moreover, this study will identify the limitations of the current studies to recommend future directions of the spatial inventories.

Therefore, the major objectives are determined:

- To select and document the relevant and the most up-to-date peer-reviewed journal articles in the Scopus database;
- To identify the key methodologies and developments in the spatial modeling of carbon emissions;
- To explore the relationship between the urban forms and the carbon emissions;
- To analyze the strengths and weaknesses of the reviewed spatial models;
- To review and discuss their current applications and limitations;
- To explore the future needs and trends in the spatial model development.

2. Methodology

Systematic reviews are considered to be the most impartial and efficient method for analyzing existing scientific research (Haddaway et al., 2015). Hence, we performed a systematic review of the research projects and studies on the spatial modeling of China's urban carbon emissions. We adopted the procedure of the PRISMA Statement form (Moher et al., 2009) which has been applied in many urban studies (Asadzadeh et al., 2017). There are four stages of the PRISMA Statement:

Identification, Screening, Eligibility, and Analysis (Moher et al., 2009).

Under the Identification process, keywords were used to search the literature database and identify possibly related studies. Scopus was chosen as the search engine in this study because it focuses on peer-reviewed academic articles and covers a broad scope of multi-disciplinary fields. Only peer-reviewed articles were identified as relevant studies in this review.

The identification in this study mainly contains two categories, category 1 is the searching on spatial modeling of urban carbon emissions in China, category 2 is about the relationship between urban forms and carbon emissions (Table 1). Keywords A contains the keywords that were used for both two categories. To incorporate all the available literature in the database, "carbon emissions" and all the synonyms of carbon emissions such as "CO₂ emission" OR "carbon dioxide emission" OR "greenhouse gas emission" were used in keywords A. Also, the study area "China" was used to limit the search results. Keywords B includes the keywords which are only used in one category. In category 1, the keywords "spatial modeling" OR "mapping" were incorporated into the search criteria to filter the papers relevant to the development of spatial inventories. "Urban" OR "city" was also included in the keywords to filter the research focusing on fossil fuel carbon emissions from transport, business, residential and industrial sectors. For the searching of literature in category 2, the keyword "urban form" was added to the searching engine. The identification process based on the selected keywords was performed for the article title, abstract, and keywords of the papers. Also, this study covered the most up-to-date literature as of May 2021.

During the process of screening, the acquired literature that is not relevant to this study was removed by manually checked the titles, abstracts, and keywords. All the obtained records were screened to exclude duplicate and unrelated documents. Thirdly, all the records after the previous two steps were examined completely to select the most relevant results, including the main text and the references. Finally, the necessary information on the related literature was extracted, processed, and synthesized in the analysis step.

3. Results

3.1. Overall results

After the searching and analysis steps, there are 106 papers in total, where 82 papers are in category 1 and 24 papers are in category 2. For category 1, the results were mainly classified based on the methods. It can be found that there are four commonly used methods: 1) top-down analyses that assign the emissions from a coarse spatial unit to a finer resolution; 2) bottom-up models that aggregate the fine emission data such as point source emissions to the desired spatial grid (Cai et al., 2018b; Wang et al., 2014); 3) carbon satellite observations which convert the CO₂ concentration from carbon satellites; and 4) hybrid method involving both bottom-up and top-down approach. For category 2, the urban form can be described in terms of land use/cover and urban morphology (Ren et al., 2017). Therefore, the retrieved literature in category 2 was categorized into the impact of urban morphology and the impact of land use/land cover characters.

Table 1
Summary of all the keywords used during the identification phase.

| Categories | Keywords A | Keywords B |
|--|---|---|
| 1. Urban carbon emissions mapping in China | "carbon emission" OR "CO ₂ emission" OR "carbon dioxide emission" OR "greenhouse gas emission" AND "China" | AND ("spatial modeling" OR "mapping") AND ("urban" OR "city") |
| 2. The relationship between urban forms and carbon emissions | | AND "urban form" |

3.2. Top-down method using nighttime lights

3.2.1. Data and adjusted indexes

Top-down methods allocate the carbon emissions within a large spatial unit to a high spatial resolution by adopting some algorithms or proxy data such as land use (Chuai and Feng, 2019), road length (Song et al., 2020). With the development of remote sensing techniques, the nighttime light (NTL) data have been the most frequently used proxy to distribute the statistical carbon emissions at the jurisdiction level. The NTL is a kind of satellite observation and derivative product to detect man-made lights, hence offering a unified, spatially explicit, continuous, and prompt monitoring of the earth’s surface during nighttime (Elvidge et al., 1997, 2013). Previous research has indicated that the NTL data can potentially reflect the socioeconomic conditions and human activities that are relevant to energy demand (Doll et al., 2000; Small et al., 2005; Sutton et al., 2001). Moreover, there is an assumption that the brightness value of the NTL is positively correlated to the carbon emissions produced by energy activities of the same pixel (Han et al., 2018). Hence, the NTL is capable of detecting urban carbon emission variations in both spatial and temporal dimensions when combined with statistical emission data.

The Defense Meteorological Satellite Program-Operational Linescan System (DMSP-OLS) launched in 1992, is the most widely used NTL data in the spatial modeling of carbon emissions due to its long time span (Lu et al., 2018; Meng et al., 2014; Shi et al., 2016; Wang and Li, 2016). Nevertheless, the DMSP data have a few notable disadvantages (Doll et al., 2000; Elvidge et al., 2010): low spatial resolution of 30 arc seconds, oversaturation problems on bright lights in urban areas, blooming effect with the lights scattered from built-up areas into areas without light, etc. These shortcomings may diminish the correlation between human activities and NTL products (Letu et al., 2010), leading to increased uncertainties in the modeling of carbon emission in certain regions, especially in large urban cores with strong artificial lighting (Letu et al., 2011; Raupach et al., 2010). The global radiance calibrated DMSP NTL data have been developed by the Earth Observation Group in National Oceanic and Atmospheric Administration’s National Geophysical Data Center (NOAA/NGDC) to solve these issues (Ziskin et al., 2010). However, there are only a few images that have been calibrated so far, limiting the application of time-series analyses of the product (Ma et al., 2014).

The satellite Visible Infrared Imaging Radiometer Suite onboard the Suomi National Polar-Orbiting Partnership (NPP-VIIRS) was developed as a brand-new source of NTL image by the NOAA/NGDC in 2011 (Elvidge et al., 2013). The new NTL data have several advancements compared to the previous DMSP-OLS product (Elvidge et al., 2013) (Table 2). The spatial grid of the NPP-VIIRS data is finer (15 arc-second). Also, the NPP-VIIRS product has already been calibrated on the satellite (Elvidge et al., 2013). Moreover, the oversaturation issue does not exist in the NPP-VIIRS due to its more sensitive day/night spectral band, which can greatly enhance the capability of identifying artificial lighting (Liao et al., 2013).

Table 2
Characteristics of DMSP-OLS and NPP-VIIRS.

| Satellite | Spatial resolution | Bands | Period | Onboard calibration | Saturation |
|-----------|--------------------|---|--------------|---------------------|------------|
| DMSP-OLS | 30 arc seconds | Nightlight, one thermal infrared (10 μm) | 1992–2013 | No | Yes |
| NPP-VIIRS | 15 arc seconds | Nightlight, 21 additional bands spanning 0.4 to 13 μm | 2012-present | Yes | No |

Recent studies have shown the progress of applying the new NPP-VIIRS data in carbon emission modeling (Cui et al., 2019; Ou et al., 2015a; Zhang et al., 2020). The comparative findings indicate that the NPP-VIIRS data can more precisely demonstrate the spatial variations of residential carbon emissions than the DMSP-OLS. The emissions modeled by the NPP-VIIRS have larger values and more detailed spatial patterns in built-up areas, thus the NPP-VIIRS data are more effective in enhancing the knowledge of the regional differences of carbon emissions and serving as a benchmark for decomposing the low-carbon goals into each subunit (Ou et al., 2015a; Zhao et al., 2018). Moreover, some modeling studies have integrated the NPP-VIIRS and the DMSP-OLS to expand the time span of the NPP-VIIRS (Lv et al., 2020; Zhao et al., 2019). These studies have demonstrated the feasibility and superiority of using the NPP-VIIRS to model carbon emissions, as well as the possibility to facilitate other scientific applications that have adopted the DMSP-OLS product.

In particular, some studies employed adjusted nighttime light indexes to eliminate the oversaturation effect of DMSP-OLS by involving vegetation information. Zhang et al. (2013) established the vegetation-adjusted NTL urban index (VANUI) by integrating the Moderate Resolution Imaging Spectroradiometer (MODIS) normalized difference vegetation index (NDVI) products with the NTL data (Equation (1)). The VANUI is easy to compute and can characterize changes in light density within urban areas. Meng et al. (2017) applied an improved VANUI to model the carbon emissions in China by incorporating NTL, MODIS NDVI, population density, and a Water-masked map from ESRI. The findings showed that the proposed improved index can better reveal the spatial patterns of human activities. The improved index is also helpful to decrease the modeling error of carbon emissions across different cities and differentiate the heterogeneity in emissions within a city. The root mean square error (RMSE) of the improved VANUI model is 5.9% lower than that of the original VANUI model.

$$VANUI = (1 - (NDVI))(NTL) \tag{1}$$

However, the VANUI, which is calculated based on NDVI, is not effective to capture the intra-urban change in fast-growing cities because NDVI is less sensitive in built-up areas with low vegetation coverage (Huete et al., 2002). At the same time, VANUI is still affected by the blooming problem of the DMSP-OLS product.

Further to the development of VANUI, the enhanced vegetation index (EVI) adjusted nighttime light index (EANTLI) has been developed (Zhuo et al., 2015). The index is computed by integrating the MODIS EVI and the DMSP-OLS (Equation (2)). Since the EVI is capable of offering information that is negatively and closely correlated with features of the urban areas (Liu et al., 2015), it has been confirmed that the index can be easily used to deal with saturation, identifying the changes of the NTL brightness value in the built-up areas. Therefore, it is very helpful for analyzing the urban structure and modeling carbon emissions (Zhuo et al., 2015). Moreover, the accuracy assessment based on the statistical carbon emission at the city level also shows that EANTLI is not only suitable and effective for modeling carbon emissions in lighting areas, but also in non-lighting areas.

$$EANTLI = \begin{cases} \frac{1 + (NTL_{norm} - EVI)}{1 - (NTL_{norm} - EVI)} \times NTL, & EVI > 0.01 \\ 0, & EVI \leq 0.01 \end{cases} \tag{2}$$

where *NTL* represents the digital number of the NTL data, *NTL_{norm}* means the normalization of *NTL*, and *EVI* refers to the EVI data retrieved from MODIS data.

Liu et al. (2018) combined the EANTLI with LandScan population data to map the urban carbon emissions in China. Zhuo et al. (2015) and Zhao et al. (2018) compared the accuracies of the VANUI and the EANTLI in mapping carbon emissions. Their results demonstrated that the EANTLI is capable of detecting significantly more spatial details within built-up areas than VANUI. Also, the EANTLI is more similar to

the calibrated NTL compared to VANUI. Finally, the EANTLI more accurately predicted the consumption of electricity for 166 Chinese prefecture-level cities and the R-squared value increased by 11.8% in the linear regression model between the predicted electricity power use and the statistical carbon emission (Zhuo et al., 2015).

3.2.2. Regression models

There are generally two main procedures for downscaling statistical carbon emissions at the jurisdiction level. The first procedure is data preparation, including the calculation of statistical carbon emissions at the administrative level from energy reports, the calibration of the NTL data, and the extraction of urban areas. Secondly, by establishing the relationship between statistical carbon emissions and NTL, an emission value is assigned to each pixel of NTL on this basis, and integrated into the urban scale.

Simple regression methods can be utilized to build the linear relationship between NTL data carbon emissions. For instance, Meng et al. (2014) predicted the urban carbon emissions for China based on the statistical relationship between the DMSP-OLS product and provincial carbon emissions. Lu and Liu (2014) adopted the DMSP-OLS product to acquire an index to represent human activities and verified the assumption that counties with close carbon emissions would cluster in space. Zhao et al. (2020) used a linear regression model to map the carbon emissions from 2000 to 2017 and explored the relationship between CO₂ emissions and nighttime land surface temperature in the Yangtze River Delta (YRD) Region.

The reliability of the simple linear relationship between NTL and statistical emissions can be weakened by the lack of data verification (Wang, S. et al., 2014). Besides, only the spatial or temporal relationship can be explored by linear regression models, which may cause deviations in the modeling of carbon emissions in both space and time dimensions. Panel data analysis can link the statistical emissions and NTL in spatiotemporal dimensions simultaneously. Therefore, panel data models have already been used for carbon emissions estimation (Cui et al., 2019; Han et al., 2018; Shi et al., 2016; Wang and Liu, 2017; Zhang et al., 2021).

Moreover, the geographical and temporally weighted regression

(GTWR) model has also been used to build the relationship between statistical carbon emissions and NTL data due to its considerations of spatial and temporal heterogeneity of CO₂ emissions. Using the GTWR and NPP-VIIRS, Zhang et al. (2020) mapped CO₂ emissions from coal boilers, thermal power plants, and natural gas boilers in 15 northern provinces from 2012 to 2017 with a resolution of 5 km × 5 km.

3.3. Bottom-up method

Bottom-up methods to model urban carbon emissions generally integrate emissions at a point or sectoral level and then allocate the emissions into the designated spatial unit (Cai et al., 2018b). The relevant studies are summarized in Table 3.

There are some open bottom-up inventories at the facility level, such as the China Cement Emission database (Liu et al., 2021) and China coal-fired Power plant Emissions Database (Liu et al., 2015). There are also other studies to develop carbon emission maps using bottom-up approaches. Zhang et al. (2014) proposed an analysis framework for carbon emissions estimation based on land use type and examined the spatial variations of carbon metabolism in Beijing. Household and personal surveys have also been applied to plot the carbon emissions (Rong et al., 2020; Yang et al., 2015). Wu et al. (2018) established a database for energy use intensity (EUI) from the Shanghai building energy efficiency monitoring platform for each building function and mapped the emissions of Shanghai based on the EUI and the building function. A traffic allocation model was deployed to simulate traffic in road networks through a gasoline consumption function (Zhang et al., 2018), i.e. the User Equilibrium (UE) in the JICA-STRADA 35 platform (Tscharaktschiew and Hirte, 2010). With the advances in big data development, taxi GPS trajectory data from taxi companies have been adopted to map high-resolution taxi emissions by daily travel (Luo et al., 2017; Xia et al., 2020; Zhang, J. et al., 2018; Zhao et al., 2017).

3.4. Carbon satellite observations

Employing carbon satellites to model urban carbon emissions is another relatively new approach. Carbon satellites are the key data

Table 3
Literature on the data used in the bottom-up methods.

| Study area | Resolution | Transportation sector | Building sector | Industrial data | Reference |
|-----------------------------------|------------------|--|--|--|---------------------|
| Shanghai | point | 1054 household surveys (transport mode, petrol consumption) | 1054 household surveys (energy use at home and demographic characteristics) | No data | Yang et al. (2015) |
| Kaifeng | point | No data | 3895 household surveys (energy use features, cognition and preferences and demographic characteristics) | No data | Rong et al. (2020) |
| Beijing | 500 m | No data | Empirical conversion coefficients from IPCC for commercial and residential land use type; land-use maps of Beijing in the government databases | Empirical conversion coefficients from IPCC for industrial land use type; land-use maps of Beijing in the government databases | Zhang et al. (2014) |
| Shandong | 500 m | Fleet size, annual average vehicle-traveled distance, vehicle age | No data | No data | Sun et al. (2016) |
| Shanghai | 100 m | No data | Building energy use from the 2016 Shanghai Statistical Yearbook and public building energy efficiency monitoring platform; building use predicted from building morphology and Point of Interest (POI) of the OpenStreetMaps | Shanghai Statistical Yearbook | Wu et al. (2018) |
| Changzhou | Line (road link) | Origin-Destination data from the survey of the individual trip in Changzhou | No data | No data | Zhang et al. (2018) |
| Hangzhou | 500 m | Taxi GPS trajectory data for 10,000 taxis, household travel questionnaires, POI data | No data | No data | Xia et al. (2020) |
| seven selected districts in Wuhan | 500 m | Taxi GPS trajectory dataset for 6500 taxis from a taxi company, travel questionnaires from Center for Social Survey Research of Wuhan University, POI data | No data | No data | Zhao et al. (2017) |
| Beijing | 100 m | Taxi GPS trajectory dataset | No data | No data | Zhang et al. (2018) |
| Shanghai | 100 m | Taxi GPS trajectory dataset for 13,675 taxis from a taxi company | No data | No data | Luo et al. (2017) |

source for observing regional and global CO₂ distributions (Crisp and Miller, 2010; Yoshida et al., 2011). The CO₂ concentration obtained by satellite observations has the advantages of global coverage, frequent temporal resolution, and uniform observation, thus the spatiotemporal changes in atmospheric CO₂ concentration can be reflected (Yang et al., 2019). At present, the satellites with public access include the Scanning Imaging Absorption Monitoring Spectrometer for Atmospheric Char- tography (SCIAMACHY) from Europe, Orbiting Carbon Observatory 2 (OCO-2) and OCO-3 from the USA, the Greenhouse Gases Observing SATellite (GOSAT) and GOSAT-2 from Japan, and the Chinese carbon dioxide observation satellite (TanSat) from China (Table 4).

The column-average dry air mole fraction of CO₂ (XCO₂) enhancements from the satellite observations are positively correlated with fossil fuel carbon emissions from human activities. Therefore, the XCO₂ can be adopted to quantitatively predict anthropogenic CO₂ emissions in a data-driven way (Yang et al., 2019). For example, Hakkarainen et al. (2016) employed the XCO₂ obtained from the OCO-2 to develop the first direct observation of anthropogenic CO₂ for the regions with high pollution including East Asia, central Europe, and the eastern USA. Yang et al. (2019) developed a method for modeling fossil fuel CO₂ emissions in China by an artificial neural network based on the XCO₂ generated from GOSAT. In order to estimate the CO₂ levels in China, Wang et al. (2011) used the level 3 products of XCO₂ obtained from the SCIAMACHY with a spatial resolution of 0.5°, land cover maps, and emission inventories of the Regional emission inventory in Asia (REAS) dataset. Yang et al. (2018) used the observations from the TanSat satellite to generate the first Tansat global XCO₂ maps.

3.5. Hybrid method

Hybrid approaches involving both bottom-up and top-down methods have been implemented to retain the accuracy of the bottom-up method and the efficiency of the top-down method. The central government and planning departments in China have produced some national spatial inventories of carbon emission using hybrid methods with open access. For example, the China High Resolution Emission Database (CHRED) was created by the Chinese Academy for Environmental Planning (Cai et al., 2018b). Among all the available emission data sources in China, the CHRED has the finest spatial resolution so far (1 km). The dataset was created primarily based on point emission sources from the industrial sector and complementary socio-economic information of Mainland China. Industrial emissions were modeled by the bottom-up approach, taking advantage of the point emission sources at the facility level containing approximately 1.5 million enterprises from the First China Pollution Source Census (FCPSC) dataset. The FCPSC may be China's first comprehensive census of energy use at the national level.

Table 4
Comparison of the carbon satellites.

| Satellite | Operator | Spatial resolution | Temporal resolution | Launch year |
|--------------------|---------------------|--------------------|---------------------|-------------|
| SCIAMACHY | ESA | 30 × 60 km | Every 6 days | 2002 |
| GOSAT | JAXA, MOE, and NIES | 10.5 km | Every 3 days | 2009 |
| GOSAT-2 | JAXA, MOE, and NIES | 9.7 km | Every 6 days | 2018 |
| OCO-2 | NASA | 1.29 × 2.25 km | Every 16 days | 2014 |
| OCO-3 ^a | NASA | 1.29 × 2.25 km | Every 16 days | 2019 |
| TanSAT | CAS | 1 × 2 km, 2 × 2 km | Every 16 days | 2016 |

ESA (Envisat, a European Space Agency), JAXA (Japanese Aerospace Exploration Agency), MOE (the Japanese Ministry of the Environment), NIES (the National Institute for Environmental Studies), NASA (The National Aeronautics and Space Administration) and CAS (Chinese Academy of Sciences).

^a <https://disc.gsfc.nasa.gov/datasets?keywords=OCO-3>.

The FCPSC contains detailed information on fossil fuel consumption and industry location at the facility level. It also includes district/county-level residential energy consumption. Emissions from the transport, services, and agricultural sectors of the CHRED were disaggregated from statistical data using social-economic and urban land use data using top-down approaches. Statistical emissions from the residential and agricultural sectors at the province level were down-scaled equally to the grid of the corresponding land use type generated from remote sensing imaging and population data. Finally, the emissions from the different sectors were synthesized into one database. In addition, Wang, J. et al. (2014) constructed a high spatial-resolution (10 km) map of carbon emissions for China, with emissions from the industrial and residential sectors also generated from the FCPSC dataset. Hao (2015) mapped the industrial, enterprise and residential emissions from the FCPSC dataset, and used weights of road type, population, and land use as proxy data to disaggregate transportation and agriculture emissions.

The standardized CHRED framework has been used for cities and regions for more precise and localized results. Cai and Wang (2013) and Cai and Zhang (2014) established a carbon emission inventory in Tianjin and Shanghai at a 1 km resolution and discussed the CO₂ emissions within different spatial boundaries. In addition, the emissions within four spatial boundaries were compared according to the carbon emission maps of Tianjin (Cai and Wang, 2013). Cai used the same framework to model the carbon emissions for Chongqing (Cai, 2014), Shanghai (Cai and Zhang, 2014), and cities in the YRD region (Cai and Wang, 2015), Jing-Jin-Ji (Beijing-Tianjin-Hebei) region (Cai et al., 2018a), and further improved the methodology by utilizing localized datasets at finer spatial resolutions.

Tsinghua University developed The Multi-resolution Emission Inventory for China (MEIC, <http://meicmodel.org/>) (Li et al., 2017; Zheng et al., 2018). The dataset contains the spatial distribution of ten air pollutants and CO₂ in mainland China with the finest grid of 0.25° × 0.25°. The inventory has 5 sectors, including power, industry, residence, transportation, and agriculture. The carbon emissions from power, cement, and steel industries are generated from two bottom-up inventories, i.e., the China Cement Emission database (Liu et al., 2021) and Global Power Emissions Database (Tong et al., 2018). Important proxy data in the top-down method for downscaling emissions include population, roads, and power plants.

Apart from using the standardized framework, localized hybrid methods have also been applied in many cities. For instance, Dai et al. (2020) produced the carbon emission database for Jinjiang city, China with a spatial resolution of 30 m and 500 m using a hybrid approach. The industrial emissions were calculated at the point level by a bottom-up method. Emissions in other sectors were allocated to the spatial grid based on spatial proxies such as population map, land use, and NTL data using top-down approaches. Similar studies have been conducted for Changxing (Liu et al., 2020) and Shanghai (Zhu et al., 2019) with industrial emissions at point level, road emissions at street level, and building emissions at the area level. Zhao et al. (2012) used the bottom-up method to estimate point-level industrial emissions and employed GDP and population to downscale provincial emissions in China at the resolution of 0.25° × 0.25°. Furthermore, Cai et al. (2020) adopted the hybrid method for developing the spatial inventory in Hong Kong with a resolution of 100 m. Industrial and airport emissions were modeled using the bottom-up method. Urban form and traffic flow were used as proxies for building and traffic emissions respectively in the top-down approach.

3.6. Impacts of urban form on carbon emissions

3.6.1. Impacts of urban morphology

It is found that the urban complexity, urban compactness, and urban development patterns are the major indicators to characterize the urban morphology. The urban complexity represents the extent of the

irregularity of the perimeter of the land lot, and urban compactness reflects the degree of dispersion or sparseness of the land lot (Makido et al., 2012). Urban development patterns include different urban development strategies such as the mononuclear pattern or multiple-nuclei pattern (Ou et al., 2019).

Several studies revealed that the increase in urban complexity has an impact on increasing carbon emissions (Fang et al., 2015; Ou et al., 2013, 2019; Shi et al., 2020; Shu et al., 2018; Wang et al., 2019). Results from quite a large number of studies showed the compact urban setting can lead to low carbon emissions and increase energy efficiency since the transport energy consumption can be reduced (Chen et al., 2008; Ou et al., 2013; Wang, M. et al., 2017; Wang, S. et al., 2017; Wang et al., 2019). Meanwhile, there are also studies having negative opinions on urban compaction since it will increase residential energy consumption (Miao, 2017; Sha et al., 2020; Ye et al., 2015). Li et al. (2018) pointed out that the urban density at the neighborhood level varies for different types of dwelling units.

There are also some debates on the effect of urbanization patterns on carbon emissions. Some studies found that polycentric urbanization can improve CO₂ emission efficiency (Ou et al., 2013; Sha et al., 2020). Therefore, they suggested urban development patterns in a decentralized and polycentric way in order to reduce CO₂ emissions. However, Wang, Y. et al. (2014) pointed out that the transformation to a scattered and polycentric urban form in Beijing could increase driving distances, which could cause a significant increase in transport emissions. Also, a study highlighted that urban development in a multiple-nuclei pattern at the metropolitan level may not effectively mitigate carbon emissions (Wang et al., 2017). A recent study revealed that the impact of urban development patterns varies for cities under different development stages (Ou et al., 2019).

3.6.2. Impacts of urban land use/land cover

The interplay between carbon emissions and urban land use has also been investigated by previous studies. Zhang et al. (2018) explored the role of land use planning in reducing carbon emissions from the transport sector. The construction land use and landscape fragmentation can increase the carbon emissions at a lower proportion and reduce the emissions at a larger proportion. Residential and commercial land uses can increase carbon emissions, while green space can decrease carbon emissions. However, the impact of industrial land use was found to be not significant in this study. Xia et al. (2020) found that land use diversity can decrease carbon emissions, while urban residential density has a positive impact on increasing carbon emissions in Hangzhou. Higher accessibility to water bodies and green space is also associated with lower carbon emissions (Ye et al., 2015). Ying et al. (2008) indicated there are significant differences in carbon emissions of different land use patterns, in which the construction land and cultivated land are the two major carbon sources, while forest land and grassland are related to low carbon emissions. Land use change is also found to be associated with high emissions (Zhao et al., 2021). Guan et al. (2019) investigated the low carbon transport (LCT) in China and concluded that only the land use diversity may not be capable of changing the LCT mode choice for Chinese cities. Liu et al. (2016) concluded that residents living in a neighborhood with higher land use mix, public transit accessibility, and more pedestrian-friendly street design tend to travel in an LCT manner. Shen et al. (2020) suggested mitigating transport emissions by improving parking availability rather than land use reconstruction.

4. Discussions

4.1. Cross-comparison of the methods

The characters of the three methods are summarized and compared in this section (Table 5). The top-down method using NTL data is simple to compute and conduct. Therefore, the approach can be applied to cities or regions without detailed emission data. Also, the method can be easily

Table 5

Cross-comparison of the three methods.

| Methods | Top-down method from nightlights | Bottom-up method | Carbon satellite observation |
|---------------------------|----------------------------------|---|------------------------------|
| Spatial coverage | Global coverage | Usually local coverage | Global coverage |
| Finest spatial resolution | 500 m | Point | 1 km |
| Temporal resolution | Monthly or annual | Usually a single year | Weekly, monthly, Or annual |
| Accessibility | Freely available | Usually requiring non-public data | Freely available |
| Accuracy | Medium accuracy (70%–90%) | Usually most accurate | Low accuracy |
| Applications | Regional, national-scale studies | Local estimation at the city, district, community or household levels | National-scale studies |

and efficiently applied to large areas as NTL data have global coverage. Therefore, the method has been widely applied at the regional and national scales for China. The accuracy of the method can achieve a medium level of 70%–90%. However, this method cannot perform well in developing countries since the relationship between the NTL pixel value and carbon emissions is less significant in developing countries than in developed countries (Doll et al., 2000). This may affect the accuracy of the top-down method in modeling the carbon emissions in developing countries with rapid urbanization and industrialization like China. Secondly, previous studies found out that the top-down method can cause almost 50% per pixel error rate from DMSP-OLS data, and these errors are geographically correlated (Rayner et al., 2010). Thirdly, the top-down approach using NTL is likely to underestimate emissions from transportation and industrial sectors because the NTL data generally reflect socioeconomic characteristics instead of fossil fuel combustion during the night, which may not accurately predict the human activities relevant to transport and industrial process (Ghosh et al., 2010). Moreover, a higher brightness value in the NTL data does not always indicate higher carbon emissions since electricity generation and electricity consumption often take place in different areas (Meng et al., 2014). Therefore, the data quality and the existing workflow of the top-down model still need to be improved to achieve more accurate and comprehensive estimates of carbon emissions.

Through requiring more detailed data, the bottom-up method usually provides the most accurate results. In particular, the bottom-up method is mainly implemented by government authorities because it is suitable for local-scale assessment and therefore favored by governors at the city, district, community, or household levels. There are also limitations of the method. Firstly, it is difficult to conduct data collection since it costs extensive time, labor force, and material resources. This method requires accurate and detailed data about energy consumption, emission sources, and socioeconomic information, so it cannot be used in cities or regions without such data, especially for developing countries and regions where such data set is either not publicly available or under development (Zheng et al., 2018). Second, it is difficult to collect energy, emission, and socioeconomic data with the same time scale and consistent status. As a consequence, the applicability and comparability of the method are limited and it can be challenging to develop a generic way to model the spatial patterns of the carbon emissions across different cities (Jing et al., 2018).

The carbon satellite approach is capable of developing a comprehensive understanding of urban carbon emissions with global coverage and frequent temporal resolution. Consistent satellite observations can be adopted to identify the carbon sources and sinks in both space and time dimensions. This method is likely to enhance the current emission inventories with the further development of satellite products. The

major shortcoming of this method is the low spatial resolution, generally greater than 10 km, depending on the sensor. Therefore, it is mostly used at the global or national levels instead of the city scale at present due to the restrictions in resolution and accuracy. Also, it is difficult to identify the variations of the magnitude of the emissions in certain urban areas from the carbon satellite system, as the CO₂ signal from the main urban cores can be spread out and deviated from the emission sources, which may result from the low resolution as well as atmospheric transmission, mixing and retention (Ou et al., 2015a). With the improvement of spatial resolution of future carbon satellites, this method can be better exploited in urban carbon emission modeling.

4.2. Policy implications

In order to recognize the importance of cities in improving energy efficiency and mitigating carbon emissions, the Chinese government aimed to encourage carbon neutrality strategies and promoted a low-carbon urban development demonstration project in 5 pilot provinces and cities in 2010 (National Development and Reform Commission of China, 2010).

The understanding of the impact of urban form can therefore be useful in formulating the low-carbon policies for Chinese cities. Fundamentally, a spatial inventory of CO₂ emission should be established for each city as a reference for the investigations on the impact of urban form. The results from the literature generally favor a regular and continuous urban form for reducing CO₂ emissions. Also, the accessibility to greenery and water bodies can help reduce carbon emissions in urban areas. However, there is yet to be a clear conclusion on the impact of urban compaction, polycentric spatial development, commercial, and industrial land use. Their influences can vary significantly among different cities. So, decision-makers should take serious considerations of these factors which deserve a detailed investigation and sectoral scrutiny. The studies also highlighted the importance of balancing the impacts of urban form and the feasibility of optimizing urban form. China already has high population densities in urban areas, therefore increasing urban compactness by further densifying the urban population to decrease carbon emissions may not always be feasible in Chinese cities. Land-use control may reduce emissions in some cities, but it usually brings higher costs. However, if policies are executed properly with cooperation across cities, or induce significant co-benefits, they could be an effective mitigation solution (Leibowicz, 2017).

4.3. Implications from other countries

Urban forms are found to influence the spatial distribution of carbon emissions; urban form data is therefore essential for constructing a more accurate spatial emission inventory. Some spatial modeling studies in other countries have already taken urban form data into account. For example, the United States developed the Vulcan dataset with a 0.1-degree resolution (<http://vulcan.project.asu.edu/research.php>). Carbon emissions from the various sectors including commercial, industrial, and residential, as well as road and non-road transport were modeled by the Vulcan dataset (Gurney et al., 2009). The Vulcan dataset was developed by a bottom-up approach using seven major datasets containing the road networks, spatial information of point emission sources, the floor and areas of buildings, etc. (Gurney et al., 2009). It is generally regarded as the most precise carbon emission inventory (Andres et al., 2012).

China can learn from the low-carbon experience of Japan for its carbon emission mitigation for the following reasons (Ouyang and Lin, 2017). First, the two countries shared similar economic development experiences (Minami, 2016). Secondly, Japan is recognized as the leading country for energy conservation and emission control in advance of other countries in the world (Honma and Hu, 2008; Ouyang and Lin, 2017). Scholars in Japan have developed accurate estimations for urban carbon emissions. Sharifi et al. (2018) proposed a standardized framework to obtain a synthetic understanding of urban carbon

emissions (Fig. 1). The framework synthesized emissions from the building and transport sectors. The annual carbon emissions of a building can be determined by the EUI and the building attributes, such as building function and building floor. For the transport sector, carbon emissions were determined by the energy consumption for each transport type and the corresponding emission factors. This framework has already been adopted to map the urban carbon emissions in Shanghai (Wu et al., 2018), and Tokyo (Sharifi et al., 2018).

The modeling methods in these countries involved high-resolution urban form data such as the building footprint and location of the point sources to accurately detect the spatial patterns of the carbon emissions in urban areas. Consequently, the location and the emissions from the various sources, such as power plants, road networks can be retained. However, most studies in China did not adopt urban form data due to data availability, and only one study used urban form data (Cai et al., 2020). The accuracy of carbon emission data in China can be improved by incorporating urban form as input.

4.4. Future research directions

With the development of urban data science, several future directions of the development of the spatial inventory can be identified from this review:

Firstly, the spatial modeling studies in China generally used land use data, NTL or population as the elementary emission sources, ignoring the impacts of urban form. With the development of urban form extraction techniques (Ren et al., 2019), further work involving high-quality urban form data in the modeling process is necessary to obtain more accurate spatial patterns of urban carbon emission for Chinese cities. Also, adopting urban form data in the modeling can support researchers, urban planners, and policymakers to have in-depth knowledge of the impact of the urban form and devise corresponding planning strategies.

Besides, previous data often have a spatial resolution greater than 1 km. Inventories with the finer spatial resolution are required for more accurate identification of emission hotspots and targeted planning strategies.

Furthermore, the IPCC method and traffic models are mostly used in the bottom-up method. Simple linear regression is widely adopted in the top-down approach. Panel data model and GTWR have also been implemented to account for spatial and temporal heterogeneity. Other machine learning algorithms such as random forest and artificial neural networks, can explore non-linear relationships with higher precision and are anticipated to increase the modeling accuracy in further studies.

Finally, in the building sector, land use, POI, and household survey are frequently used for spatial analysis. For the transportation sector, road network, taxi GPS data, vehicle information are the commonly used spatial data. Industry locations and point-level energy consumption are generally used for mapping industrial emissions. Nevertheless, the industry locations and energy activities, taxi GPS data, vehicle information, and household surveys are generally unavailable for most cities in China. The lack of a generally applicable method using open data impedes the consistency of carbon emission estimates and mitigation strategies across different cities. Therefore, an open-data based standardized methodology is essential for collaborative efforts in carbon emission assessment and mitigation strategies for global cities.

5. Conclusions

In this study, the spatial modeling of urban carbon emissions and the impact of urban form in China are systematically reviewed and analyzed. The currently available datasets and methods for spatial modeling are summarized. The common methods include top-down approaches using NTL, bottom-up analyses, carbon satellite observations, and hybrid methods.

The strengths and weaknesses of the methods were compared to

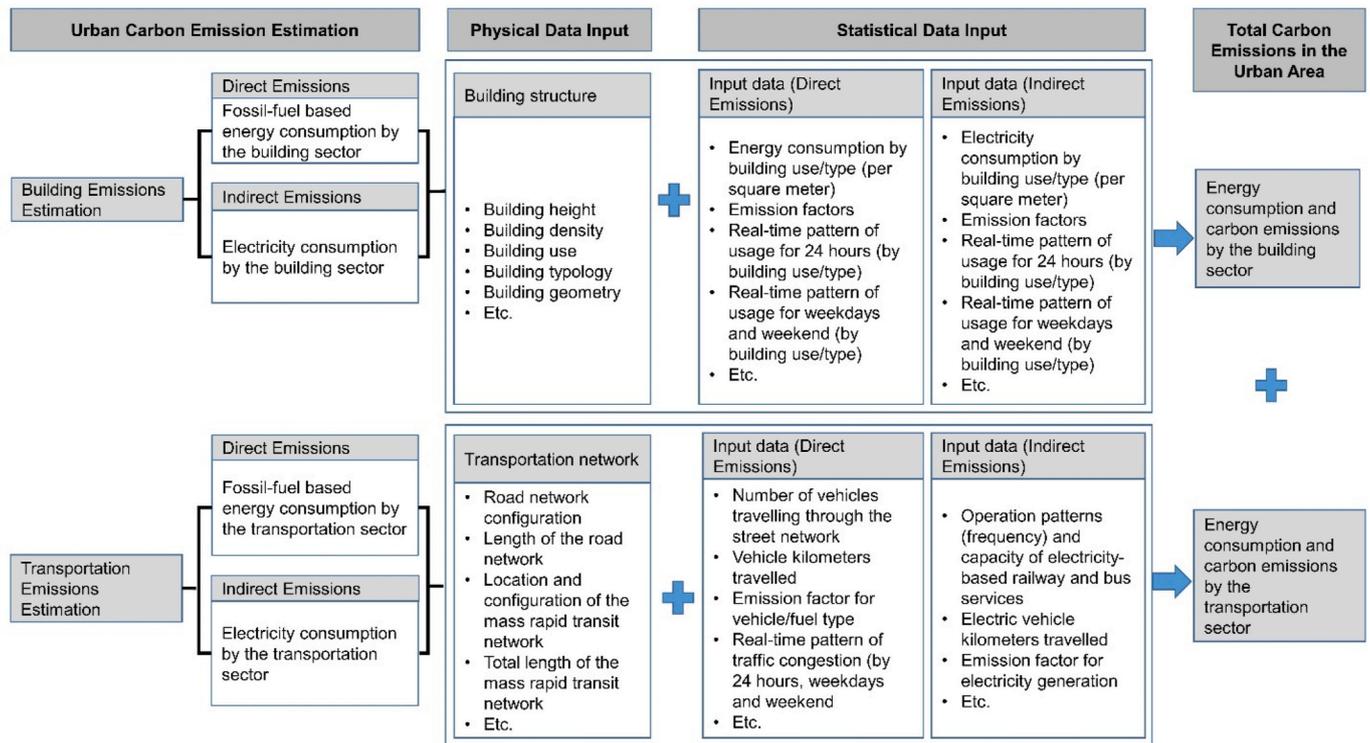


Fig. 1. The framework for modeling urban carbon emissions proposed by Sharifi et al. (2018).

explore the future needs and trends in the development of spatial models. The top-down method based on the NTL can be implemented to predict the spatial variations of the regional and national carbon emissions using openly available data sources, but the accuracy of the product can be influenced by the data quality of the NTL and the underestimation of the emissions from transport and industrial sector. The bottom-up method has generally been conducted locally by government authorities or planning departments and has been able to secure accurate carbon emission data. However, the universal application of this method is limited by data availability. The carbon satellite method is relatively new. It is simple to implement but its application in urban areas is still limited due to the coarse spatial resolution.

The urban forms, including urban morphology and land use, are found to affect carbon emissions. In terms of urban morphology, the increase in the urban complexity can contribute to higher carbon emissions, while there are still some discussions on the impacts of urban compaction and the choice of urban spatial development pattern. The impact of the proportions of land use types varies in cities under different development stages and sizes. Therefore, the impact of the urban form should be analyzed for individual cities for a specific and targeted understanding. The policymakers and urban planners should seriously consider these urban form indicators and develop corresponding urban design policies in a sensible way.

However, based on the literature, it is found that most studies in China do not consider urban form data. This may greatly impact the urban carbon emission estimation and management since a complex urban morphology and high-density urban context can be found in most Chinese cities. Moreover, the spatial inventories of urban carbon emission in China generally have a low spatial resolution over 1 km. Urban carbon emission models with a finer resolution are needed for more accurate urban studies at the neighborhood and building scales. With newly developed urban morphology extraction technology and machine learning techniques, more accurate inventories of urban carbon emissions at higher spatial resolutions can be developed by incorporating detailed data on urban form. Open and high-quality urban form data can

also contribute to the development of a generic method to conduct high-resolution urban carbon emission modeling for global cities.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgment

The study is supported by a PGS studentship from The Chinese University of Hong Kong. It is also partially supported by the Strategic Interdisciplinary Research Scheme (Project no.: 102009942) from the University of Hong Kong. The authors are grateful to Miss Kwok Yu Ting for the language editing and proofreading.

References

- Andres, R.J., Boden, T.A., Bréon, F.M., Ciais, P., Davis, S., Erickson, D., Gregg, J.S., Jacobson, A., Marland, G., Miller, J., Oda, T., Olivier, J.G.J., Raupach, M.R., Rayner, P., Treanton, K., 2012. A synthesis of carbon dioxide emissions from fossil-fuel combustion. *Biogeosciences* 9 (5), 1845–1871.
- Asadzadeh, A., Kötter, T., Salehi, P., Birkmann, J., 2017. Operationalizing a concept: the systematic review of composite indicator building for measuring community disaster resilience. *Int. J. Disaster Risk Reduct.* 25, 147–162.
- Cai, B., 2014. CO₂ emissions in four urban boundaries of China-Case study of Chongqing. *China Environ. Sci.* 34, 2439–2448.
- Cai, B., Li, W., Dhakal, S., Wang, J., 2018a. Source data supported high resolution carbon emissions inventory for urban areas of the Beijing-Tianjin-Hebei region: spatial patterns, decomposition and policy implications. *J. Environ. Manag.* 206, 786–799.
- Cai, B., Liang, S., Zhou, J., Wang, J., Cao, L., Qu, S., Xu, M., Yang, Z., 2018b. China high resolution emission database (CHRED) with point emission sources, gridded emission data, and supplementary socioeconomic data. *Resour. Conserv. Recycl.* 129, 232–239.
- Cai, B., Wang, J., 2013. CO₂ emissions of Tianjin based on 1 km grid dataset. *Acta Sci. Circumstantiae* 33 (6), 1655–1664.
- Cai, B., Wang, J., 2015. Analysis of the CO₂ emission performance of urban areas in Yangtze River delta region. *China Popul. Resour. Environ.* 10, 45–52.
- Cai, B., Zhang, L., 2014. Study on the spatial characteristics of urban CO₂ emissions in Shanghai. *Progressus Inquisitiones De Mutatione Climatis* 10 (6), 417–426.

- Cai, M., Shi, Y., Ren, C., 2020. Developing a high-resolution emission inventory tool for low-carbon city management using hybrid method – a pilot test in high-density Hong Kong. *Energy Build.* 226, 110376.
- Cao, X., Wang, J., Chen, J., Shi, F., 2014. Spatialization of electricity consumption of China using saturation-corrected DMSP-OLS data. *Int. J. Appl. Earth Obs. Geoinf.* 28, 193–200.
- Chen, H., Jia, B., Lau, S., 2008. Sustainable urban form for Chinese compact cities: challenges of a rapid urbanized economy. *Habitat Int.* 32 (1), 28–40.
- Chen, Q., Cai, B., Dhakal, S., Pei, S., Liu, C., Shi, X., Hu, F., 2017. CO₂ emission data for Chinese cities. *Resour. Conserv. Recycl.* 126, 198–208.
- Chuai, X., Feng, J., 2019. High resolution carbon emissions simulation and spatial heterogeneity analysis based on big data in Nanjing City, China. *Sci. Total Environ.* 686, 828–837.
- Clarke-Sather, A., Qu, J., Wang, Q., Zeng, J., Li, Y., 2011. Carbon inequality at the sub-national scale: a case study of provincial-level inequality in CO₂ emissions in China 1997–2007. *Energy Pol.* 39 (9), 5420–5428.
- Crisp, D., Miller, C., 2010. Contributions of the Orbiting Carbon Observatory (OCO) to the Detection of Anthropogenic CO₂ Emissions, EGU General Assembly Conference Abstracts. 7342.
- Cui, Y., Zhang, W., Wang, C., Streets, D.G., Xu, Y., Du, M., Lin, J., 2019. Spatiotemporal dynamics of CO₂ emissions from central heating supply in the North China Plain over 2012–2016 due to natural gas usage. *Appl. Energy* 241, 245–256.
- Dai, S., Zuo, S., Ren, Y., 2020. A spatial database of CO₂ emissions, urban form fragmentation and city-scale effect related impact factors for the low carbon urban system in Jinjiang city, China. *Data in Brief* 29.
- Doll, C.H., Muller, J.-P., Elvidge, C.D., 2000. Night-time imagery as a tool for global mapping of socioeconomic parameters and greenhouse gas emissions. *AMBIO A J. Hum. Environ.* 29 (3), 157–162.
- Elvidge, C.D., Baugh, K.E., Kihn, E.A., Kroehl, H.W., Davis, E.R., Davis, C.W., 1997. Relation between satellite observed visible-near infrared emissions, population, economic activity and electric power consumption. *Int. J. Rem. Sens.* 18 (6), 1373–1379.
- Elvidge, C.D., Baugh, K.E., Zhizhin, M., Hsu, F.-C., 2013. Why VIIRS data are superior to DMSP for mapping nighttime lights. *Proc. Asia-Pacific Adv. Netw.* 35, 62, 0.
- Elvidge, C.D., Keith, D.M., Tuttle, B.T., Baugh, K.E., 2010. Spectral identification of lighting type and character. *Sensors* 10 (4), 3961–3988.
- Fang, C., Wang, S., Li, G., 2015. Changing urban forms and carbon dioxide emissions in China: a case study of 30 provincial capital cities. *Appl. Energy* 158, 519–531.
- Ghosh, T., Elvidge, C.D., Sutton, P.C., Baugh, K.E., Ziskin, D., Tuttle, B.T., 2010. Creating a global grid of distributed fossil fuel CO₂ emissions from nighttime satellite imagery. *Energies* 3 (12), 1895–1913.
- Guan, C., Srinivasan, S., Nielsen, C.P., 2019. Does neighborhood form influence low-carbon transportation in China? *Transport. Res. Transport Environ.* 67, 406–420.
- Gurney, K.R., Mendoza, D.L., Zhou, Y., Fischer, M.L., Miller, C.C., Geethakumar, S., de la Rue du Can, S., 2009. High resolution fossil fuel combustion CO₂ emission fluxes for the United States. *Environ. Sci. Technol.* 43 (14), 5535–5541.
- Haddaway, N., Woodcock, P., Macura, B., Collins, A., 2015. Making literature reviews more reliable through application of lessons from systematic reviews. *Conserv. Biol.* 29 (6), 1596–1605.
- Hakkarainen, J., Jalongo, I., Tamminen, J., 2016. Direct space-based observations of anthropogenic CO₂ emission areas from OCO-2, 11 *Geophys. Res. Lett.* 43 (21), 400–411, 406.
- Han, J., Meng, X., Liang, H., Cao, Z., Dong, L., Huang, C., 2018. An improved nighttime-based method for modeling urban CO₂ emissions. *Environ. Model. Software* 107, 307–320.
- Hao, Y., 2015. High-resolution mapping of carbon flows in urban systems: a case study in Guangyuan, an earthquake-affected Mountainous city of China. *J. Environ. Inform.*
- Honma, S., Hu, J.-L., 2008. Total-factor energy efficiency of regions in Japan. *Energy Pol.* 36 (2), 821–833.
- Huete, A., Didan, K., Miura, T., Rodriguez, E.P., Gao, X., Ferreira, L.G., 2002. Overview of the radiometric and biophysical performance of the MODIS vegetation indices. *Rem. Sens. Environ.* 83 (1–2), 195–213.
- IPCC, C.C., 2007. The Fourth Assessment Report (AR4) of the United Nations Intergovernmental Panel on Climate Change. Intergovernmental Panel on Climate Change.
- Jing, Q., Bai, H., Luo, W., Cai, B., Xu, H., 2018. A top-bottom method for city-scale energy-related CO₂ emissions estimation: a case study of 41 Chinese cities. *J. Clean. Prod.* 202, 444–455.
- Kanemoto, K., Moran, D., Hertwich, E.G., 2016. Mapping the carbon footprint of nations. *Environ. Sci. Technol.* 50 (19), 10512–10517.
- Leibowicz, B.D., 2017. Effects of urban land-use regulations on greenhouse gas emissions. *Cities* 70, 135–152.
- Letu, H., Hara, M., Tana, G., Nishio, F., 2011. A saturated light correction method for DMSP/OLS nighttime satellite imagery. *IEEE Trans. Geosci. Rem. Sens.* 50 (2), 389–396.
- Letu, H., Hara, M., Yagi, H., Naoki, K., Tana, G., Nishio, F., Shuhei, O., 2010. Estimating energy consumption from night-time DMSP/OLS imagery after correcting for saturation effects. *Int. J. Rem. Sens.* 31 (16), 4443–4458.
- Li, C., Song, Y., Kaza, N., 2018. Urban form and household electricity consumption: a multilevel study. *Energy Build.* 158, 181–193.
- Li, M., Liu, H., Geng, G., Hong, C., Liu, F., Song, Y., Tong, D., Zheng, B., Cui, H., Man, H., 2017. Anthropogenic emission inventories in China: a review. *Natl. Sci. Rev.* 4 (6), 834–866.
- Liao, L., Weiss, S., Mills, S., Hauss, B., 2013. Suomi NPP VIIRS day-night band on-orbit performance, 12 *J. Geophys. Res.* 118 (22), 705–712, 718.
- Lindsey, R., 2020. Climate Change: Atmospheric Carbon Dioxide. National Oceanographic and Atmospheric Administration, News & Features.
- Liu, F., Zhang, Q., Tong, D., Zheng, B., Li, M., Huo, H., He, K., 2015. High-resolution inventory of technologies, activities, and emissions of coal-fired power plants in China from 1990 to 2010. *Atmos. Chem. Phys.* 15 (23), 13299–13317.
- Liu, H., Yan, F., Tian, H., 2020. A vector map of carbon emission based on point-line-area carbon emission classified allocation method. *Sustainability* 12 (23), 1–21.
- Liu, J., Tong, D., Zheng, Y., Cheng, J., Qin, X., Shi, Q., Yan, L., Lei, Y., Zhang, Q., 2021. Carbon and air pollutant emissions from China's cement industry 1990–2015: trends, evolution of technologies, and drivers. *Atmos. Chem. Phys.* 21 (3), 1627–1647.
- Liu, X., Hu, G., Ai, B., Li, X., Shi, Q., 2015. A normalized urban areas composite index (NUACI) based on combination of DMSP-OLS and MODIS for mapping impervious surface area. *Rem. Sens.* 7 (12), 17168–17189.
- Liu, X., Ou, J., Wang, S., Li, X., Yan, Y., Jiao, L., Liu, Y., 2018. Estimating spatiotemporal variations of city-level energy-related CO₂ emissions: an improved disaggregating model based on vegetation adjusted nighttime light data. *J. Clean. Prod.* 177, 101–114.
- Liu, Z., Ma, J., Chai, Y., 2016. Neighborhood-scale urban form, travel behavior, and CO₂ emissions in Beijing: implications for low-carbon urban planning. *Urban Geogr.* 38 (3), 381–400.
- Lu, H., Liu, G., 2014. Spatial effects of carbon dioxide emissions from residential energy consumption: a county-level study using enhanced nocturnal lighting. *Appl. Energy* 131, 297–306.
- Lu, H., Liu, G., Miao, C., Zhang, C., Cui, Y., Zhao, J., 2018. Spatial pattern of residential carbon dioxide emissions in a rapidly urbanizing Chinese city and its mismatch effect. *Sustainability* 10 (3), 827.
- Luo, X., Dong, L., Dou, Y., Zhang, N., Ren, J., Li, Y., Sun, L., Yao, S., 2017. Analysis on spatial-temporal features of taxis' emissions from big data informed travel patterns: a case of Shanghai, China. *J. Clean. Prod.* 142, 926–935.
- Lv, Q., Liu, H., Wang, J., Liu, H., Shang, Y., 2020. Multiscale analysis on spatiotemporal dynamics of energy consumption CO₂ emissions in China: utilizing the integrated of DMSP-OLS and NPP-VIIRS nighttime light datasets. *Sci. Total Environ.* 703, 134394.
- Ma, T., Zhou, C., Pei, T., Haynie, S., Fan, J., 2014. Responses of Suomi-NPP VIIRS-derived nighttime lights to socioeconomic activity in China's cities. *Rem. Sens. Lett.* 5 (2), 165–174.
- Makido, Y., Dhakal, S., Yamagata, Y., 2012. Relationship between urban form and CO₂ emissions: evidence from fifty Japanese cities. *Urban Clim.* 2, 55–67.
- Meng, L., Graus, W., Worrell, E., Huang, B., 2014. Estimating CO₂ (carbon dioxide) emissions at urban scales by DMSP/OLS (Defense Meteorological Satellite Program's Operational Linescan System) nighttime light imagery: methodological challenges and a case study for China. *Energy* 71, 468–478.
- Meng, X., Han, J., Huang, C., 2017. An improved vegetation adjusted nighttime light urban index and its application in quantifying spatiotemporal dynamics of carbon emissions in China. *Rem. Sens.* 9 (8), 829.
- Miao, L., 2017. Examining the impact factors of urban residential energy consumption and CO₂ emissions in China – evidence from city-level data. *Ecol. Indic.* 73, 29–37.
- Minami, R., 2016. *The Economic Development of China: a Comparison with the Japanese Experience*. Springer.
- Moher, D., Liberati, A., Tetzlaff, J., Altman, D.G., Group, P., 2009. Preferred reporting items for systematic reviews and meta-analyses: the PRISMA statement. *PLoS Med.* 6 (7), e1000097.
- National Development and Reform Commission of China, 2010. *The Notice of Piloting Low-Carbon Provinces and Low-Carbon Cities*, 2010.
- Netherlands Environmental Assessment Agency, 2007. *China Now No. 1 in CO₂ Emissions; USA in Second Position*. Netherlands Environmental Assessment Agency Bilthoven.
- Ou, J., Liu, X., Li, X., Chen, Y., 2013. Quantifying the relationship between urban forms and carbon emissions using panel data analysis. *Landsc. Ecol.* 28 (10), 1889–1907.
- Ou, J., Liu, X., Li, X., Li, M., Li, W., 2015a. Evaluation of NPP-viirs nighttime light data for mapping global fossil fuel combustion CO₂ emissions: a comparison with DMSP-OLS nighttime light data. *PLoS One* 10 (9), e0138310.
- Ou, J., Liu, X., Li, X., Shi, X., 2015b. Mapping global fossil fuel combustion CO₂ emissions at high resolution by integrating nighttime light, population density, and traffic network data. *IEEE J. Select. Topics Appl. Earth Observ. Rem. Sens.* 9 (4), 1674–1684.
- Ou, J., Liu, X., Wang, S., Xie, R., Li, X., 2019. Investigating the differentiated impacts of socioeconomic factors and urban forms on CO₂ emissions: empirical evidence from Chinese cities of different developmental levels. *J. Clean. Prod.* 226, 601–614.
- Ouyang, X., Lin, B., 2017. Carbon dioxide (CO₂) emissions during urbanization: a comparative study between China and Japan. *J. Clean. Prod.* 143, 356–368.
- Pachauri, R.K., Allen, M.R., Barros, V.R., Broome, J., Cramer, W., Christ, R., Church, J.A., Clarke, L., Dahe, Q., Dasgupta, P., 2014. *Climate Change 2014: Synthesis Report. Contribution of Working Groups I, II and III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*. IPCC.
- Paltsev, S., Morris, J., Cai, Y., Karplus, V., Jacoby, H., 2012. The role of China in mitigating climate change. *Energy Econ.* 34, S444–S450.
- Raupach, M., Rayner, P., Paget, M., 2010. Regional variations in spatial structure of nightlights, population density and fossil-fuel CO₂ emissions. *Energy Pol.* 38 (9), 4756–4764.
- Rayner, P., Raupach, M., Paget, M., Peylin, P., Koffi, E., 2010. A new global gridded data set of CO₂ emissions from fossil fuel combustion: methodology and evaluation. *J. Geophys. Res.* 115 (D19).

- Ren, C., Cai, M., Li, X., Shi, Y., See, L., 2019. Developing a Rapid Method for 3-dimensional Urban Morphology Extraction Using Open-Source Data Sustainable Cities and Society.
- Ren, C., Ng, E., Mills, G., Ching, J., Bechel, B., See, L., Masson, V., Feddema, J., Aliaga, D. G., 2017. WUDAPT Global Initiative: Census of Global Cities.
- Rong, P., Zhang, Y., Qin, Y., Liu, G., Liu, R., 2020. Spatial patterns and driving factors of urban residential embedded carbon emissions: an empirical study in Kaifeng, China. *J. Environ. Manag.* 271.
- Sha, W., Chen, Y., Wu, J., Wang, Z., 2020. Will polycentric cities cause more CO₂ emissions? A case study of 232 Chinese cities. *J. Environ. Sci. (China)* 96, 33–43.
- Shan, Y., Guan, D., Liu, J., Mi, Z., Liu, Z., Liu, J., Schroeder, H., Cai, B., Chen, Y., Shao, S., Zhang, Q., 2017. Methodology and applications of city level CO₂ emission accounts in China. *J. Clean. Prod.* 161, 1215–1225.
- Sharifi, A., Wu, Y., Khamchiangta, D., Yoshida, T., Yamagata, Y., 2018. Urban carbon mapping: towards a standardized framework. *Energy Procedia* 152, 799–808.
- Shen, T., Hong, Y., Thompson, M.M., Liu, J., Huo, X., Wu, L., 2020. How does parking availability interplay with the land use and affect traffic congestion in urban areas? The case study of Xi'an, China. *57. Sustainable Cities and Society*.
- Shi, K., Chen, Y., Yu, B., Xu, T., Chen, Z., Liu, R., Li, L., Wu, J., 2016. Modeling spatiotemporal CO₂ (carbon dioxide) emission dynamics in China from DMSP-OLS nighttime stable light data using panel data analysis. *Appl. Energy* 168, 523–533.
- Shi, K., Xu, T., Li, Y., Chen, Z., Gong, W., Wu, J., Yu, B., 2020. Effects of urban forms on CO₂ emissions in China from a multi-perspective analysis. *J. Environ. Manag.* 262.
- Shu, X., Xia, C., Li, Y., Tong, J., Shi, Z., 2018. Relationships between carbon emission, urban growth, and urban forms of urban agglomeration in the Yangtze River Delta. *Acta Ecol. Sin.* 38 (17), 6302–6313.
- Small, C., Pozzi, F., Elvidge, C.D., 2005. Spatial analysis of global urban extent from DMSP-OLS night lights. *Rem. Sens. Environ.* 96 (3–4), 277–291.
- Song, X., Hao, Y., Zhu, X., 2020. Vehicular emission inventory establishment and characteristics research in the Yangtze River delta urban agglomeration. *Huanjing Kexue Xuebao/Acta Scientiae Circumstantiae* 40 (1), 90–101.
- Sun, S., Jiang, W., Gao, W., 2016. Vehicle emission trends and spatial distribution in Shandong province, China, from 2000 to 2014. *Atmos. Environ.* 147, 190–199.
- Sutton, P., Roberts, D., Elvidge, C., Baugh, K., 2001. Census from Heaven: an estimate of the global human population using night-time satellite imagery. *Int. J. Rem. Sens.* 22 (16), 3061–3076.
- Tong, D., Zhang, Q., Davis, S.J., Liu, F., Zheng, B., Geng, G., Xue, T., Li, M., Hong, C., Lu, Z., 2018. Targeted emission reductions from global super-polluting power plant units. *Nat. Sustain.* 1 (1), 59–68.
- Tscharaktschiew, S., Hirte, G., 2010. The drawbacks and opportunities of carbon charges in metropolitan areas—a spatial general equilibrium approach. *Ecol. Econ.* 70 (2), 339–357.
- UN DESA, 2018. World Urbanisation Prospects, 2018 Revision. New York.
- Wang, B., 2009. Exploring China's climate change policy from both international and domestic perspectives. *Am. J. Chin. Stud.* 87–104.
- Wang, J., Cai, B., Zhang, L., Cao, D., Liu, L., Zhou, Y., Zhang, Z., Xue, W., 2014. High resolution carbon dioxide emission gridded data for China derived from point sources. *Environ. Sci. Technol.* 48 (12), 7085–7093.
- Wang, K., Jiang, H., Zhang, X., Zhou, G., 2011. Analysis of spatial and temporal variations of carbon dioxide over China using SCIAMACHY satellite observations during 2003–2005. *Int. J. Rem. Sens.* 32 (3), 815–832.
- Wang, M., Madden, M., Liu, X., 2017. Exploring the relationship between urban forms and CO₂ emissions in 104 Chinese cities. *J. Urban Plann. Dev.* 143 (4), 04017014.
- Wang, S., Fang, C., Guan, X., Pang, B., Ma, H., 2014. Urbanisation, energy consumption, and carbon dioxide emissions in China: a panel data analysis of China's provinces. *Appl. Energy* 136, 738–749.
- Wang, S., Fang, C., Wang, Y., Huang, Y., Ma, H., 2015. Quantifying the relationship between urban development intensity and carbon dioxide emissions using a panel data analysis. *Ecol. Indic.* 49, 121–131.
- Wang, S., Liu, X., 2017. China's city-level energy-related CO₂ emissions: spatiotemporal patterns and driving forces. *Appl. Energy* 200, 204–214.
- Wang, S., Liu, X., Zhou, C., Hu, J., Ou, J., 2017. Examining the impacts of socioeconomic factors, urban form, and transportation networks on CO₂ emissions in China's megacities. *Appl. Energy* 185, 189–200.
- Wang, S., Wang, J., Fang, C., Li, S., 2019. Estimating the impacts of urban form on CO₂ emission efficiency in the Pearl River Delta, China. *Cities* 85, 117–129.
- Wang, Y., Hayashi, Y., Chen, J., Li, Q., 2014. Changing urban form and transport CO₂ emissions: an empirical analysis of Beijing, China. *Sustainability* 6 (7), 4558–4579.
- Wang, Y., Li, G., 2016. Mapping urban CO₂ emissions using DMSP/OLS 'city lights' satellite data in China. *Environ. Plann.* 49 (2), 248–251.
- Wu, Y., Sharifi, A., Yang, P., Borjigin, H., Murakami, D., Yamagata, Y., 2018. Mapping building carbon emissions within local climate zones in Shanghai. *Energy Procedia* 152, 815–822.
- Xia, C., Xiang, M., Fang, K., Li, Y., Ye, Y., Shi, Z., Liu, J., 2020. Spatial-temporal distribution of carbon emissions by daily travel and its response to urban form: a case study of Hangzhou, China. *J. Clean. Prod.* 257.
- Xinhua, 2020. Xi's Statements at UN Meetings Demonstrate China's Global Vision, Firm Commitment. Xinhuanet, Beijing.
- Yang, D., Liu, Y., Cai, Z., Chen, X., Yao, L., Lu, D., 2018. First global carbon dioxide maps produced from TanSat measurements. *Adv. Atmos. Sci.* 35 (6), 621–623.
- Yang, F., Li, Y., Xu, J., 2016. Review on urban GHG inventory in China. *Int. Rev. Spatial Plan. Sustain. Dev.* 4 (2), 46–59.
- Yang, S., Lei, L., Zeng, Z., He, Z., Zhong, H., 2019. An assessment of anthropogenic CO₂ emissions by satellite-based observations in China. *Sensors* 19 (5).
- Yang, S., Wang, C., Lo, K., Wang, M., Liu, L., 2015. Quantifying and mapping spatial variability of Shanghai household carbon footprints. *Front. Energy* 9 (1), 115–124.
- Ye, H., He, X., Song, Y., Li, X., Zhang, G., Lin, T., Xiao, L., 2015. A sustainable urban form: the challenges of compactness from the viewpoint of energy consumption and carbon emission. *Energy Build.* 93, 90–98.
- Ying, L., Xian-jin, H., Feng, Z., 2008. Effects of land use patterns on carbon emission in Jiangsu Province. *Trans. Chin. Soc. Agric. Eng.* 24, 102–107.
- Yoshida, Y., Ota, Y., Eguchi, N., Kikuchi, N., Nobuta, K., Tran, H., Morino, I., Yokota, T., 2011. Retrieval algorithm for CO₂ and CH₄ column abundances from short-wavelength infrared spectral observations by the Greenhouse gases observing satellite. *Atmos. Meas. Techn.* 4 (4), 717.
- Zhang, J., Chen, F., Wang, Z., Wang, R., Shi, S., 2018. Spatiotemporal patterns of carbon emissions and taxi travel using GPS data in Beijing. *Energies* 11 (3), 500.
- Zhang, Q., Schaaf, C., Seto, K.C., 2013. The vegetation adjusted NTL urban index: a new approach to reduce saturation and increase variation in nighttime luminosity. *Rem. Sens. Environ.* 129, 32–41.
- Zhang, R., Matsushima, K., Kobayashi, K., 2018. Can land use planning help mitigate transport-related carbon emissions? A case of Changzhou. *Land Use Pol.* 74, 32–40.
- Zhang, W., Cui, Y., Wang, J., Wang, C., Streets, D.G., 2020. How does urbanization affect CO₂ emissions of central heating systems in China? An assessment of natural gas transition policy based on nighttime light data. *J. Clean. Prod.* 276.
- Zhang, Y., Linlin, X., Weining, X., 2014. Analyzing spatial patterns of urban carbon metabolism: a case study in Beijing, China. *Landsc. Urban Plann.* 130, 184–200.
- Zhang, Y., Pan, J., Zhang, Y., Xu, J., 2021. Spatial-temporal characteristics and decoupling effects of China's carbon footprint based on multi-source data. *J. Geogr. Sci.* 31 (3), 327–349.
- Zhao, J., Chen, Y., Ji, G., Wang, Z., 2018. Residential carbon dioxide emissions at the urban scale for county-level cities in China: a comparative study of nighttime light data. *J. Clean. Prod.* 180, 198–209.
- Zhao, J., Ji, G., Yue, Y., Lai, Z., Chen, Y., Yang, D., Yang, X., Wang, Z., 2019. Spatio-temporal dynamics of urban residential CO₂ emissions and their driving forces in China using the integrated two nighttime light datasets. *Appl. Energy* 235, 612–624.
- Zhao, J., Zhang, S., Yang, K., Zhu, Y., Ma, Y., 2020. Spatio-temporal variations of CO₂ emission from energy consumption in the yangtze river delta region of China and its relationship with nighttime land surface temperature. *Sustainability* 12 (20), 1–17.
- Zhao, P., Kwan, M.-P., Qin, K., 2017. Uncovering the spatiotemporal patterns of CO₂ emissions by taxis based on Individuals' daily travel. *J. Transport Geogr.* 62, 122–135.
- Zhao, Y., Ma, S., Fan, J., Cai, Y., 2021. Examining the effects of land use on carbon emissions: evidence from pearl river delta. *Int. J. Environ. Res. Publ. Health* 18 (7).
- Zhao, Y., Nielsen, C.P., McElroy, M.B., 2012. China's CO₂ emissions estimated from the bottom up: recent trends, spatial distributions, and quantification of uncertainties. *Atmos. Environ.* 59, 214–223.
- Zheng, B., Tong, D., Li, M., Liu, F., Hong, C., Geng, G., Li, H., Li, X., Peng, L., Qi, J., 2018. Trends in China's anthropogenic emissions since 2010 as the consequence of clean air actions. *Atmos. Chem. Phys.* 18 (19), 14095–14111.
- Zheng, S., Alvarado, V., Xu, P., Leu, S.-Y., Hsu, S.-C., 2018. Exploring spatial patterns of carbon dioxide emission abatement via energy service companies in China. *Resour. Conserv. Recycl.* 137, 145–155.
- Zhou, N., Price, L., Yande, D., Creyts, J., Khanna, N., Fridley, D., Lu, H., Feng, W., Liu, X., Hasanbeigi, A., 2019. A roadmap for China to peak carbon dioxide emissions and achieve a 20% share of non-fossil fuels in primary energy by 2030. *Appl. Energy* 239, 793–819.
- Zhu, H., Pan, K., Liu, Y., Chang, Z., Jiang, P., Li, Y., 2019. Analyzing temporal and spatial characteristics and determinant factors of energy-related CO₂ emissions of Shanghai in China using high-resolution gridded data. *Sustainability* 11 (17), 4766.
- Zhuo, L., Zheng, J., Zhang, X., Li, J., Liu, L., 2015. An improved method of night-time light saturation reduction based on EVI. *Int. J. Rem. Sens.* 36 (16), 4114–4130.
- Ziskin, D., Baugh, K., Hsu, F.C., Ghosh, T., Elvidge, C., 2010. Methods used for the 2006 radiance lights. *Proc. Asia-Pacific Adv. Netw.* 30, 131–142.